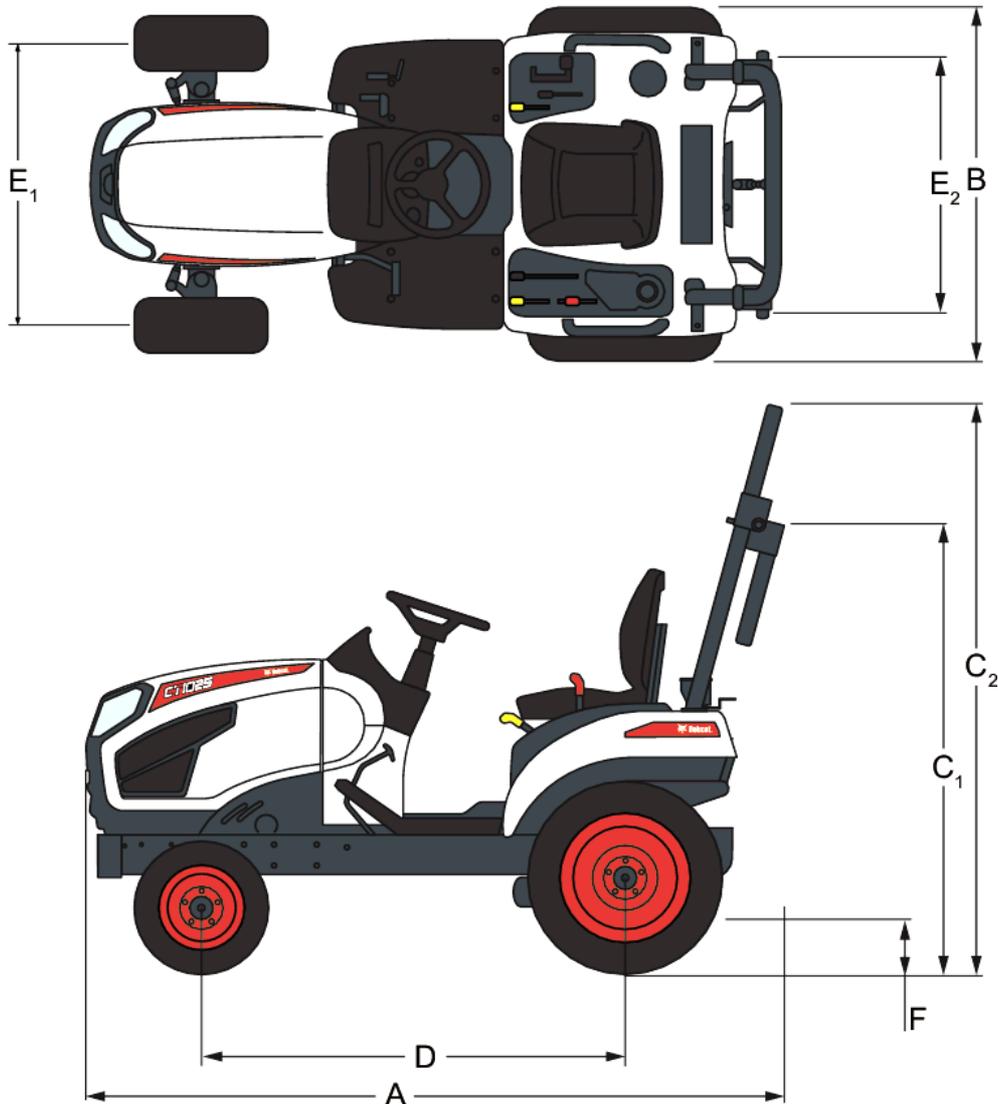


Dimensions


(A1) Overall Length with Ballast Weights	2834.0 mm
(D) Wheelbase	1400.0 mm
(C2) Overall height	2224.0 mm
(K) Front track width	930.0 mm
(M) Rear track width	864.0 mm
(N) Ground Clearance under the Rear Axle (Hitch Frame)	160.0 mm
(B) Overall Width	1160.0 mm
(Wt.) Weight with ROPS	719 kg

Standard Features

- 4 Wheel Drive
- Rear View Mirror
- Battery
- Horn
- 7 Pin Socket
- OPC
- Cup holder
- SMV sign
- PTO Cover
- HST Cruise
- Toolbox
- Front Hitch
- Hydrostatic Power Steering
- Rear folding ROPS
- Rear PTO, Independent
- 12V Aux
- Beacon Ready Wiring
- Engine Hood, one piece
- Vinyl Suspension Seat, w/retractable seat belt

Engine

Engine type	3 cylinder, water cooled, 4 cycle, Indirect Injection (IDI)
Fuel	Diesel
Displacement	1.00 L
Max Torque	57.0 Nm
Gross Power (ECE-R120)	24.5 HP
Net Power	23.0 HP
Rated revolution	3200.0 RPM
Alternator	12V 50A
Air Cleaner	Dry type, replaceable
Fuel tank	25.50 L

Drive Train

Transmission	HST, 2 range
Shuttle Type	Hydrostatic Drive
Max. Travelling Speed Forward	16.5 km/h
Max. Travelling Speed Reverse	11.2 km/h
Steering	Hydrostatic Power Steering
Turning radius(w/brake)	2540.0 mm
Brake type	Wet disc type
Mechanical differential lock	Rear Std.
Front wheel drive system	Manual(MEC)

Hydraulic System

Implement Pump	18.70 L/min
Power steering pump	7.00 L/min
Total hydraulic flow	25.70 L/min
No.of Std. remote valve's ports (Rear)	Std. (2 port)

Hitch

Check Link type (HST Transmission)	Turn-buckle
Top Link type	Turn-buckle
Lift rod type	Turn-buckle
@lift point (Horizontal position)	800(1763)
Lift capacity at lift point	715 kg
Lift capacity at 610 mm (24 in.) behind lift point	318 kg
Drawbar type	Bar

PTO

Max PTO Power	18.5 HP
Rear PTO	SAE 1-3/8, 6 Spline
Rear PTO type	Independent
Rear PTO speed	540.0 RPM
Mid PTO speed	2200.0 RPM

Capacity (Other)

Engine crankcase(included filter)	3.80 L
Coolant	3.30 L
Transmission case	13.00 L
Support of front axle	2.00 L

Tires

Turf tires	Front: 18x8.5-10 R3 / Rear: 26x12.00-12 R3
Industrial Tires	Front: 18x8.5-10 R4 / Rear: 26x12.00-12 R4